

SL-PP40W2K1

Millable 2-way push button 40 mm (black)

**PRODUCT FEATURES**

- ▶ 2-way push button for routing with 35 mm diameter.
- ▶ No battery and no wiring necessary!
- ▶ Battery-free device without external power supply.
- ▶ Transmission energy is generated from mechanical energy when the rocker is actuated.
- ▶ Radio-based range up to 80 meters. (open area)
- ▶ One button can be connected to any number of Push Power Receivers.
- ▶ **Functions:**
 - ON - OFF - DIMMING with MONO receiver, (2 areas controllable)
 - ON - OFF - DIMMING - setting the COLOUR for DUO, DUO2-Pol and RGB receivers
- ▶ With DUO, DUO2-Pol and RGB, the first learned button is used to switch on/off and the opposite button is used for colour adjustment.
- ▶ When several switches are used, a changeover switch function is provided.
- ▶ Available in white (K60) and black (K1) version.

ASSEMBLY

- ▶ Can be milled with 35 mm pot hole drill bit
- ▶ Milling diameter: 35 mm
- ▶ Milling depth: min. 15 mm

DIMENSIONS

- ▶ Push button (DxH): 40 x 19 mm

TECHNICAL FEATURES


- ▶ Transmission protocol: RF 433 mhz
- ▶ Range: 30 metres (indoors)
- ▶ IP rating: IP20

SAFETY AND INSTALLATION INSTRUCTIONS

- ▶ This product is not a toy and is not suitable for children!
- ▶ The SIRO LED system is only suitable for indoor use.
- ▶ Unprotected outdoor use is not permitted.
- ▶ Contact with moisture must be avoided at all costs!


SCOPE OF DELIVERY

- ▶ Push button
- ▶ Mounting ring


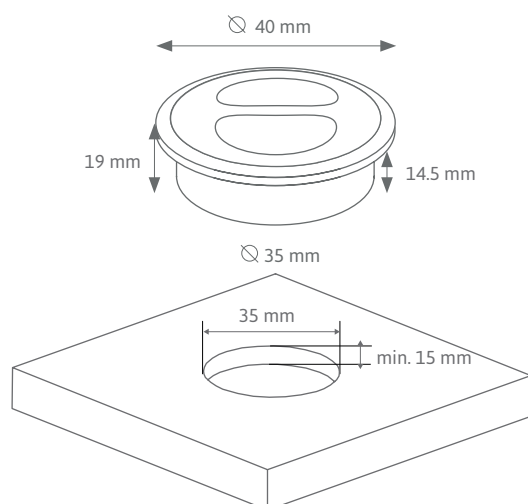
TECHNICAL DRAWING

GENERAL FUNCTIONS

1, 2	2-way buttons
Single click:	Switching on or off
Click and hold button 1:	Dimming 5 - 100%
Click and hold button 2:	Colour adjustment
Click and hold when switched off:	Night mode (5% brightness)



POSSIBLE COMBINATIONS

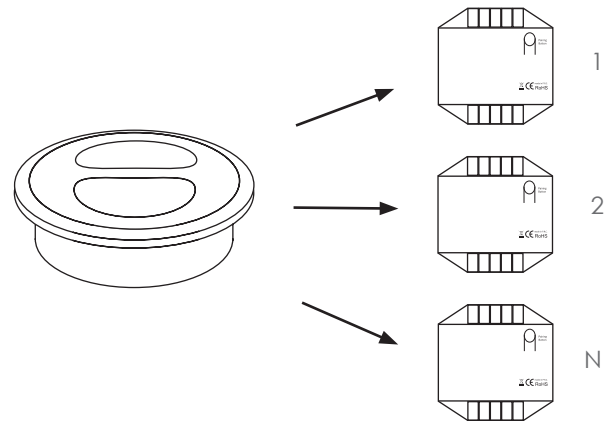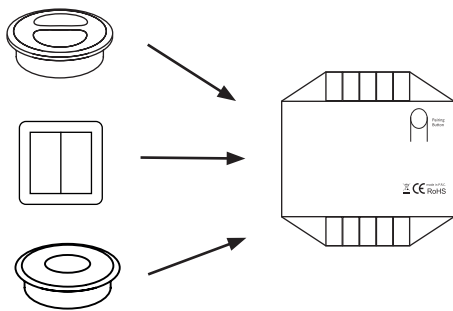


More controls on one receiver

a maximum of 10 PushPower control units (sensors, push buttons, etc.) can be connected to one receiver.

One control on several receivers

1 PushPower control unit can control any number of receivers..


CONNECTING THE CONTROL UNIT & RECEIVER



Indicator light on the receiver flashes



OR



OR




press and hold for 3 seconds

Press any button on a PushPower control unit.

2-way switch (2 options) or 4-way switch (4 options) or press the contact point for sensors

RESET RECEIVER



Indicator light on the receiver flashes



Indicator light on the receiver lights up continuously and then switches off

press and hold for 7 seconds